



Water & Sewage
Pumping and
Treatment Engineers

The Pump People.

Amos Pumps (UK) Ltd
Wen dron, Helston,
Cornwall. TR13 0PY
Tel: 01326-573341
Fax: 01326-572322

Pump-in-a-Box

*****Technical Data Sheet

General Characteristics

The Tallas Pump-in-a-Box is designed for home or industrial use with automatic operation having many commercial uses as well as domestic. Being designed to be free standing it eliminates the need for costly excavations thus making it suitable both for the handy D.I.Y. builder or to be used in temporary situations.

The Box has part cut holes for easy access for plumbing fittings making it ideal for fixing to washing machines or dishwashers in basements or sinks in utility rooms below drain height or for taking the dirty water from a shower.


The technopolymer container holds 30 litres, opening is easy by removing the clips on the lid which is sealed with a soft rubber gasket to stop any odours being released.

Operating temperature range and full technical details are available.



Hydraulic Data -					
litres per minute	0	40	80	100	120
metres head	6.9	5.3	3.2	2	1

Total weight: 9.2 Kg.

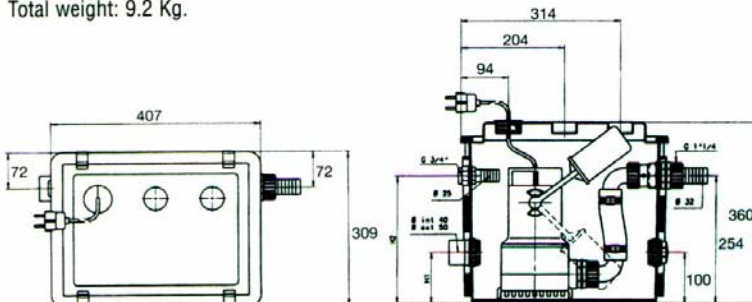

Pump Technical Specification

Pump - 240/220v, 1ph, 50Hz 0.3 hp motor with floatswitch connected, integral capacitor, supplied with 5 metres of cable with moulded 13 amp plug.

Solids handling capacity of 10 mm diameter soft solids. Not sewage.

Manufacturers reserve the right to change specifications without prior notice

Leaflet PBox July 02

Visit our website for details of our full range of pumps and accessories. www.amospumps.com